

Description

The HT20340S is an unmatched discrete LDMOS Power Amplifier with 400W saturated output power covering frequency range from 10 to 300 MHz.

Features

- Operating Frequency Range: 10~300 MHz
- Operating Drain Voltage: 50V
(Maximum: 55V)
- Saturation Output Power: 400W
- Excellent thermal stability due to low thermal resistance package
- Enhanced robustness design without device degradation
- Internally integrated enhanced ESD design

Applications

- Microwave heating
- Microwave thawing
- Other RF energy applications




TO247-3L



Plastic high power package with a hole; 3 leads

HT20340S

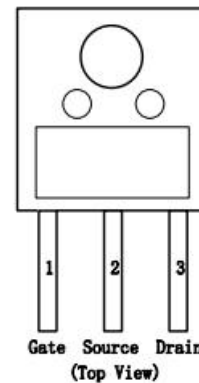

Note: Exposed backside of the package is the source terminal for the transistor

Pin Connections

Ordering Information

Part Number	Description
HT20340S	Tube Package
HT20340S EVB	40.68MHz EVB

Typical Performance

RF Characteristics (CW)

Freq (MHz)	Gain (dB)	P5dB (dBm)	Eff(%)@P5dB
40.68	32.46	54.02	75.26

Test conditions unless otherwise noted: 25 °C, VDD = +40Vdc, IDQ = 250mA, Vgs= 2.9V, test on WATECH Application Board

RF Characteristics (CW)

Freq (MHz)	Gain (dB)	P5dB (dBm)	Eff (%)
40.68	31.92	53.32	79.51

Test conditions unless otherwise noted: 25 °C, VDD = +36Vdc, IDQ= 250mA, Vgs= 2.9V, test on WATECH Application Board

Absolute Maximum Ratings

Parameter	Range/Value	Unit
Drain voltage (V _{DSS})	-0.5 to +130	V
Gate voltage (V _{GS})	-5 to +10	V
Storage Temperature (T _{STG})	-55 to +150	°C
Junction Temperature (T _J)	-40 to +225	°C

Electrical Specification

DC Characteristics

Parameter	Conditions	Min	Typ	Max	Unit
Breakdown Voltage V _{(BR)DSS}	Vgs=0V, Ids=288uA		130		V
Gate-Source Threshold Voltage V _{GS(th)}	Vds=10V, Ids=288uA	1.5	2.2	2.9	V
Drain Leakage Current I _{DSS}	Vgs=0V, Vds=50V		0.1	10	uA
Gate Leakage Current I _{GSS}	Vgs=5V, Vds=0V		0.01	1	uA


Load Mismatch Test

Condition	Test Result
VSWR=65:1, at all Phase Angles, V _{DD} = +40Vdc, I _{DQ} = 250mA, CW, P _{AVG} = 252W, Frequency 40.68MHz test on WATECH Application Board	No Device Degradation

Thermal Information

Parameter	Condition	Value (Typ)	Unit
Thermal Resistance Junction to Case (R_{TH})	$T_{CASE} = 80^{\circ}C$, $V_{DD} = +50Vdc$, $I_{DQ} = 100mA$, CW 400W,freq@40 MHz	0.5	$^{\circ}C / W$

HT20340S 40.68MHz Reference Design

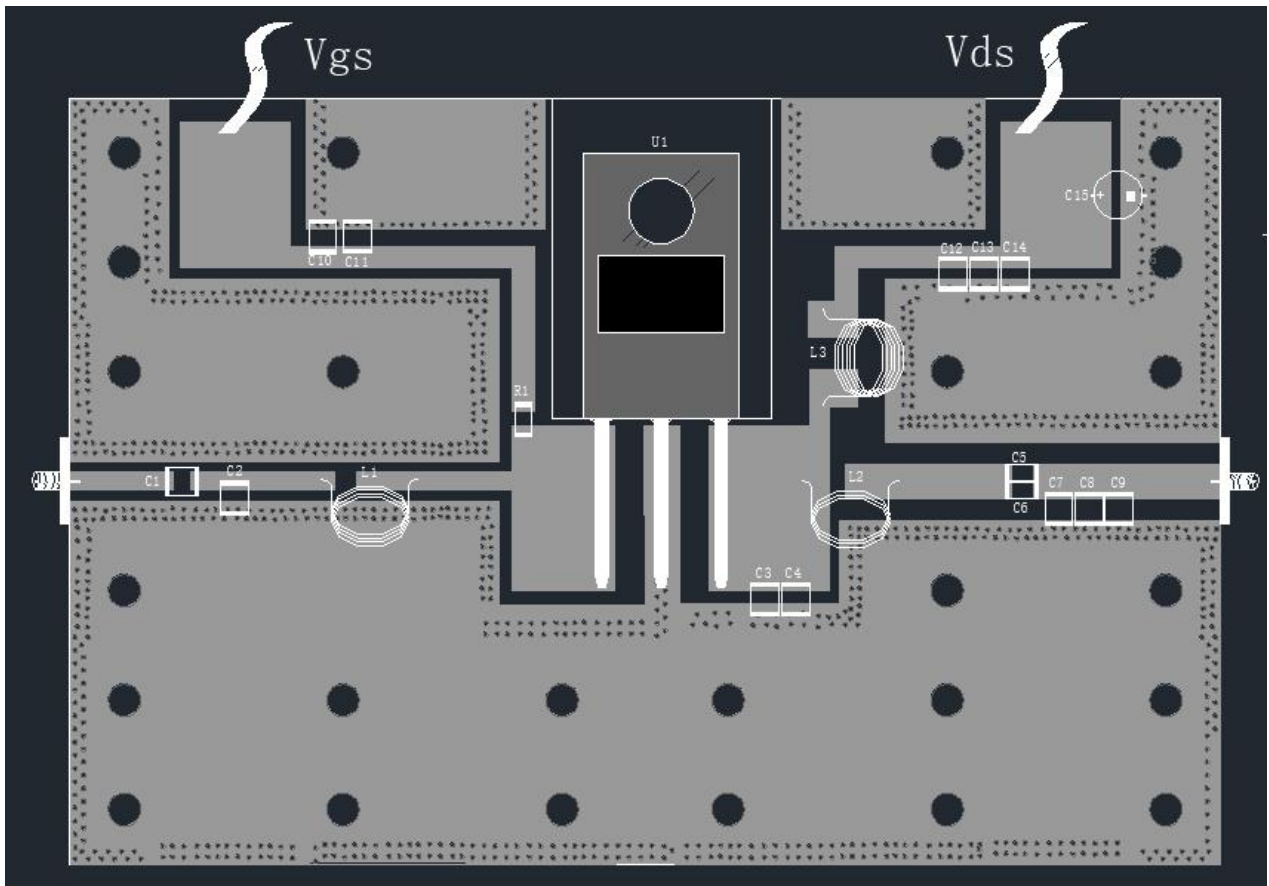

EVB Layout

Bill of Materials (BoM) - HT20340S 40.68MHz Reference Design

Reference	Value	Description	Manufacturer	P/N
U1	-	400W,10 - 300 MHz LDMOS PA	Watech	HT20340S
C1,C12	820pF	Chip Capacitor	DLC	DLC70B821JW501XT
C2	180pF	Chip Capacitor	DLC	DLC70B181JW501XT
C3,C7	120pF	Chip Capacitor	DLC	DLC70B121JW501XT
C4,C5,C6	30pF	Chip Capacitor	DLC	DLC70B300JW501XT




HT20340S 400W, 10 - 300 MHz LDMOS Amplifier

Product datasheet


C8	100pF	Chip Capacitor	DLC	DLC70B101JW501XT
C9	82pF	Chip Capacitor	DLC	DLC70B820JW501XT
C10,C13,C14	10uF	Chip Capacitor	Murata	GRJ32QR73A103KWJ1
C11	1nF	Chip Capacitor	Murata	GRJ32ER71E106KE11
C15	470uF	Electrolytic Capacitor	KNSCHA	01EC1316
R1	51 Ω	Wire Resister	KOA	WK73R2BTDD1002F
L1	4 turns,d=11mm	Air Inductor	1 mm copper wire	-
L2	3 turns,d=11mm	Air Inductor	1 mm copper wire	-
L3	6 turns,d=11mm	Air Inductor	1 mm copper wire	-
PCB	FR4 (er = 4.5), 60 mil (1.524 mm), 35 μ m (1oz)			

Performance Plots

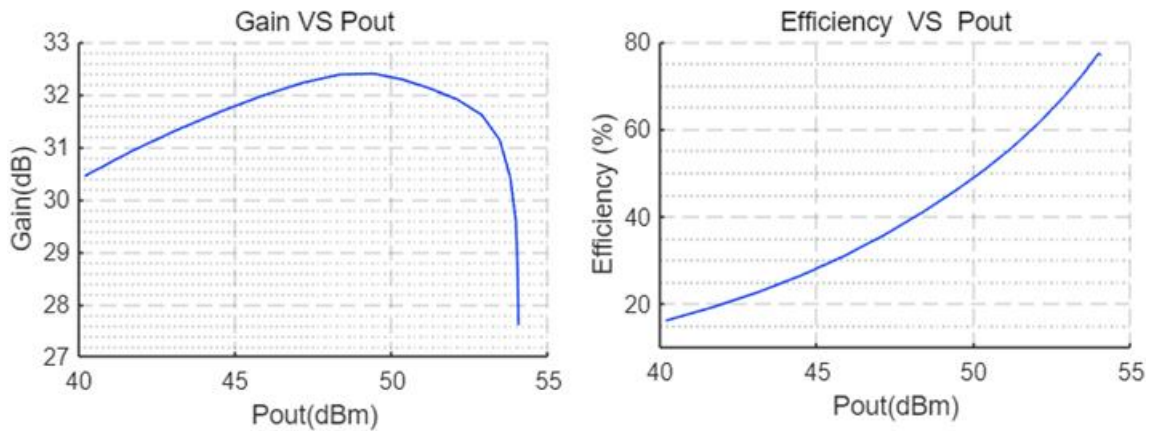

Pulsed CW, Gain and Efficiency vs Pout


Test conditions unless otherwise noted: 25 °C, VDD = +40Vdc, IDQ=250mA, Vgs=2.9V, CW test on WATECH Application Board

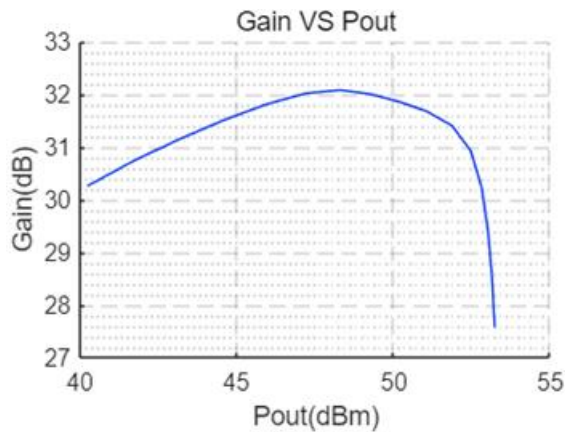

Pulsed CW, Gain and Efficiency vs Pout

Test conditions unless otherwise noted: 25 °C, VDD = +36Vdc, IDQ= 250mA, Vgs=2.9V, CW test on WATECH Application Board


Package Marking and Dimensions



- Line1 (fixed): Part No in W/O
- Line2 (unfixed): The last eight digits or letters of Marking Lot No in W/O (Sample:EERA0001)
- Line3 (unfixed): Date Code

This Marking SPEC only stipulates the content of Marking. For marking requirements such as font and size, please refer to the latest version of "Watech Product Printing Specification"

Marking

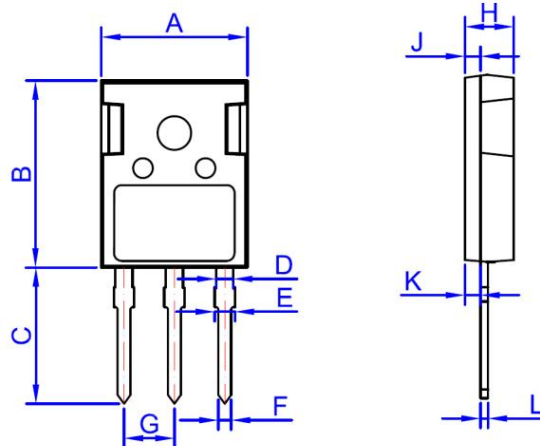


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.50	15.80	16.10	0.610	0.622	0.634
B	20.80	21.00	22.20	0.819	0.827	0.874
C	19.70	20.00	20.30	0.776	0.787	0.799
D	1.80	2.00	2.20	0.071	0.079	0.087
E	1.90	2.10	2.30	0.075	0.083	0.091
F	1.00	1.20	1.40	0.039	0.047	0.055
G		5.44			0.214	
H	4.80	5.00	5.20	0.189	0.197	0.205
J	1.90	2.00	2.10	0.075	0.079	0.083
K	2.20	2.35	2.50	0.087	0.093	0.098
L	0.41	0.60	0.79	0.016	0.024	0.031

Package Dimensions

Tape and Reel Information

Package Type	Qty/Tube(pcs)	Qty/Box(pcs)	Qty/Carton(pcs)
TO-247	30	600	2400

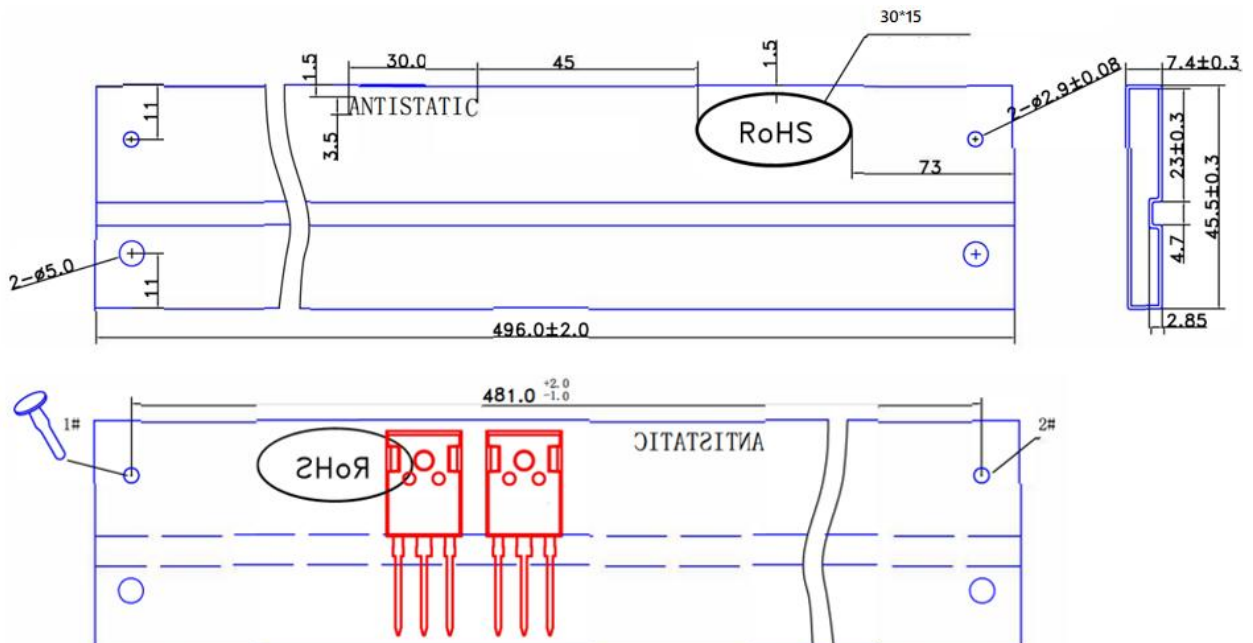

Packaging Descriptions

Handling Precautions

Parameter	Grade
Moisture Sensitivity Level MSL	3

Parameter	Rating	Standard
ESD – Human Body Model (HBM)	Class 2	JESD22-A114
ESD – Human Body Model (MM)	Class B	EIA/JESD22-A115



RoHS Compliance

This product is compliant with the 2011/65/EU RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment), as amended by Directive 2015/863/EU.

Datasheet Status

Document status	Product status	Definition
Objective Datasheet	Design simulation	Product objective specification
Preliminary Datasheet	Customer sample	Engineering samples and first test results
Product Datasheet	Mass production	Final product specification

Abbreviations

Acronym	Definition
LDMOS	Laterally-Diffused Metal-Oxide Semiconductor
CW	Continuous Waveform

Revision history

Document ID	Datasheet Status	Release Date	Revision Version
Rev 1.0	Product	Jun. 2023	Product
Rev 1.1	Product	March 2024	Version released after re review

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations and information about WATECH:

- Web: www.watechelectronics.com
- Email: MKT@huatai-elec.com

For technical questions and application information:

- Email: MKT@huatai-elec.com

Important Notice

Information in this document is believed to be accurate and reliable. However, WATECH does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

“Typical” parameters are the average values expected by WATECH in large quantities and are provided for information purposes only. All information and specifications contained herein are subject to change without notice and customers should obtain and verify the latest relevant information before placing orders for WATECH products.

The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

Applications that are described herein for any of these products are for illustrative purposes only. WATECH makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using WATECH products, and WATECH accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the WATECH product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third-party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

WATECH products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a WATECH product can reasonably be expected to result in personal injury, death or severe property or environmental damage. This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.